





RAM
WINDOWS

**NEW CONSTRUCTION WINDOWS
THERMAL PERFORMANCE**

**SERIES 900
CASEMENT WINDOW**

PRODUCT SERIES	GLAZING TYPE	U-FACTOR	SHGC	VLT
Series 900 Casement Window	PPG SB 70XL Low-E I.G. w/ Argon Gas	0.42	0.20	0.45
	Cardinal 270 Low-E I.G. w/ Argon Gas	0.41	0.27	0.49
	Cardinal 340 Low-E I.G. w/ Argon Gas	0.40	0.13	0.27
	Cardinal 366 Low-E I.G. w/ Argon Gas	0.40	0.20	0.45
	PPG SB 70XL Low-E I.G. w/ Argon Gas & Muntins	0.42	0.19	0.41
	Cardinal 270 Low-E I.G. w/ Argon Gas & Muntins	0.41	0.25	0.45
	Cardinal 340 Low-E I.G. w/ Argon Gas & Muntins	0.40	0.13	0.25
	Cardinal 366 Low-E I.G. w/ Argon Gas & Muntins	0.40	0.19	0.41

Test Methods: NFRC 100-2004 for U-Factor, NFRC 200-2004 for SHGC and Visible Light Transmittance

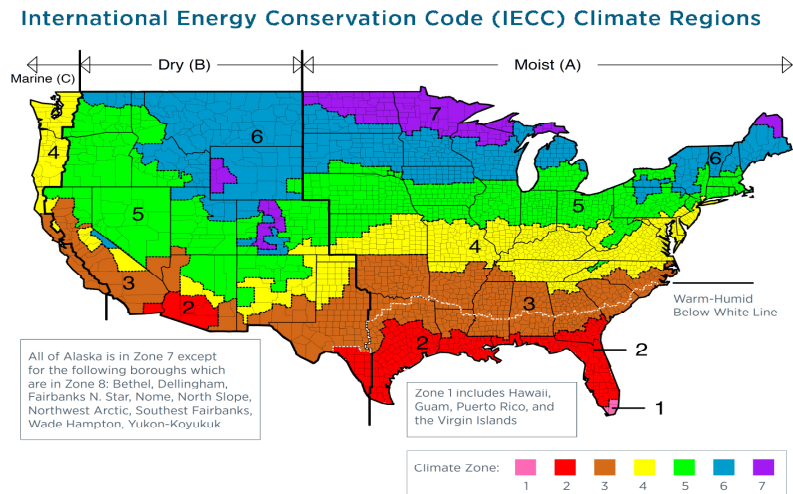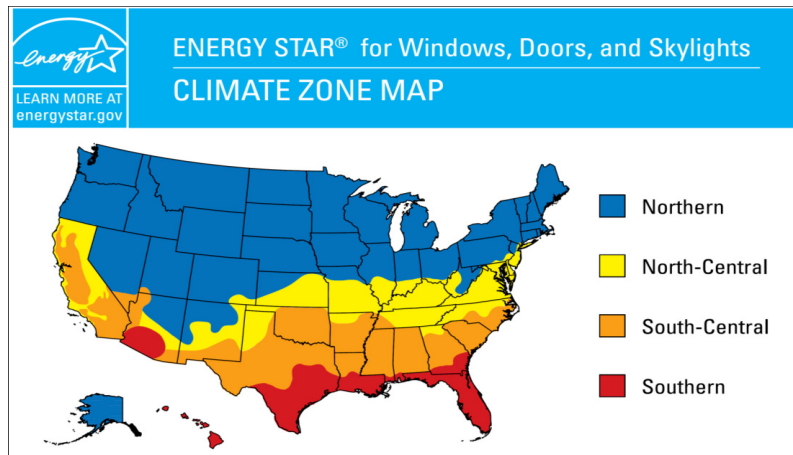

For more information on RAM Windows, visit us online at www.ramwindows.com or call us at 281-495-9056.